






보링헤드 3,000~6,000RPM 조절가능,
주방 및 가구 자동라인

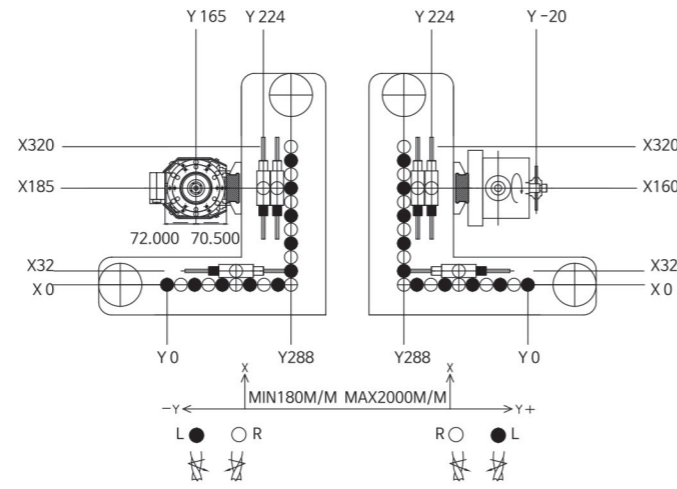

보링헤드 배치도

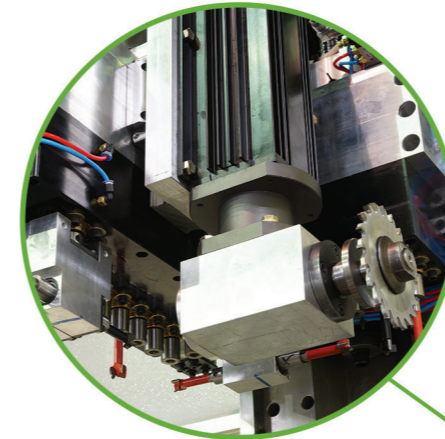

구루빙 5kw, 6,000rpm

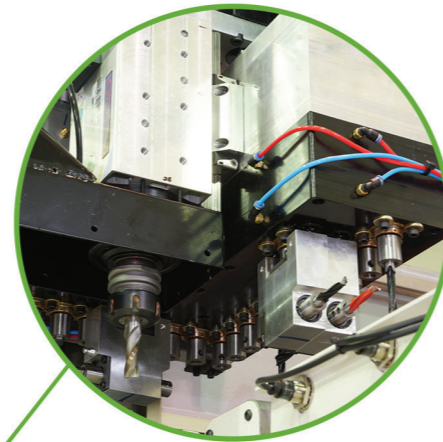

루터 4.5kw, ISO30, 18,000rpm

Model : EXEL-404JT

CNC Point to Point Boring M/C



EXEL-404JT 기계 사양 Mechanical Specifications

| | |
|----------------|-------------------------------------|
| 최대.최소 X축 방향 가공 | 300 ~ 2400 × 2EA |
| 최대.최소 Y축 방향 가공 | 160 ~ 700 × 4EA |
| 벨트이송속도 | 13m/min ~ 50m/min |
| 총축수 | 92축 |
| 수직축 | 20축 × 4EA |
| 수평축 X방향 | 2축 × 4EA |
| 수평축 Y방향 | 1축 × 4EA |
| 루터 | 4.5kW , ISO30 , 24,000rpm × 2EA |
| 구루빙 | 1.5kW , 6,000rpm |
| 보링헤드회전 | 3,000 ~ 6,500rpm |
| 가공속도 | 80m/min / Y : 80m/min / Z : 25m/min |
| 공기압 | 6Bar이상 |
| 중량 | 6,500kg |
| 기계크기(L/I/H) | 8,000mm × 2,200mm × 2,000mm |

CNC Point to Boring M/C Model : EXEL - 404JT

